

541,333

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number
WO 2004/061294 A2

(51) International Patent Classification⁷:

F03B

(74) Agents: NORTH, Vaughn, W. et al.; Thorpe, North & Western, L.L.P., P.O. Box 1219, Sandy, UT 84091-1219 (US).

(21) International Application Number:

PCT/US2003/041730

(22) International Filing Date:

31 December 2003 (31.12.2003)

(25) Filing Language:

English

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(30) Priority Data:

60/437,555 31 December 2002 (31.12.2002) US

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): ECO FORCE SYSTEMS, LLC [US/US]; 5076 South 2100 East, Holladay, UT 84117 (US).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: UNDERWATER WAVE/ENERGY TRANSDUCER

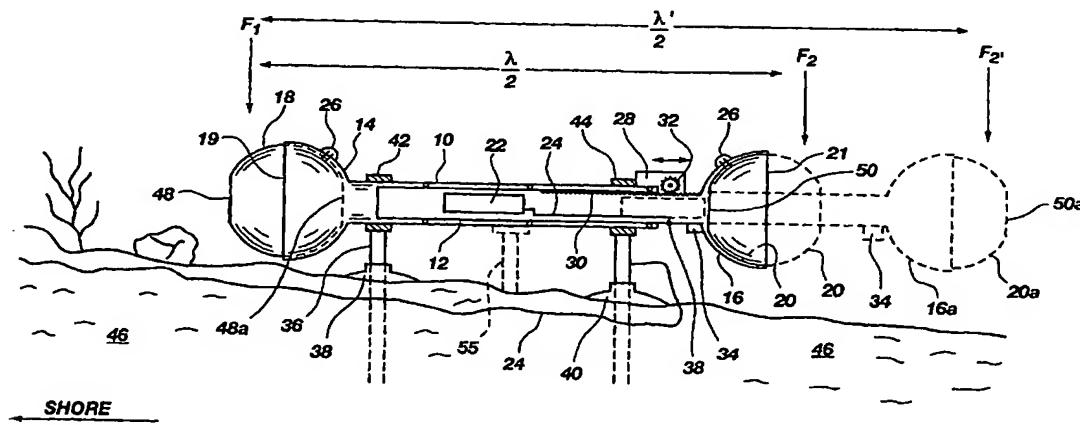

WO 2004/061294 A2

(57) Abstract: An energy transducer device for positioning at the ocean floor for converting wave action at an ocean surface above the transducer to electrical current, the device comprising a mounting base 38, 91, 106, 112, 123, 133, 143, 153, 163, and 179 configured for positioning at the ocean floor below a location of possible wave action wherein overhead wave displacement generates reciprocating water displacement along a flow path F near the ocean floor; and an electro-mechanical transducer 22, 72, 92, 100, 110, 120, 130, 140, 150, 160, 170, 180 coupled to the mounting base and configured for positioning within the flow path and responsive to the reciprocating water movement along the flow path to generate electrical current.